


TAGS-7 TURN-KEY AIRBORNE GRAVITY SYSTEM

Smaller sensor, full feedback system, and a host of other features takes the world's best dynamic gravity sensing system to the next level.

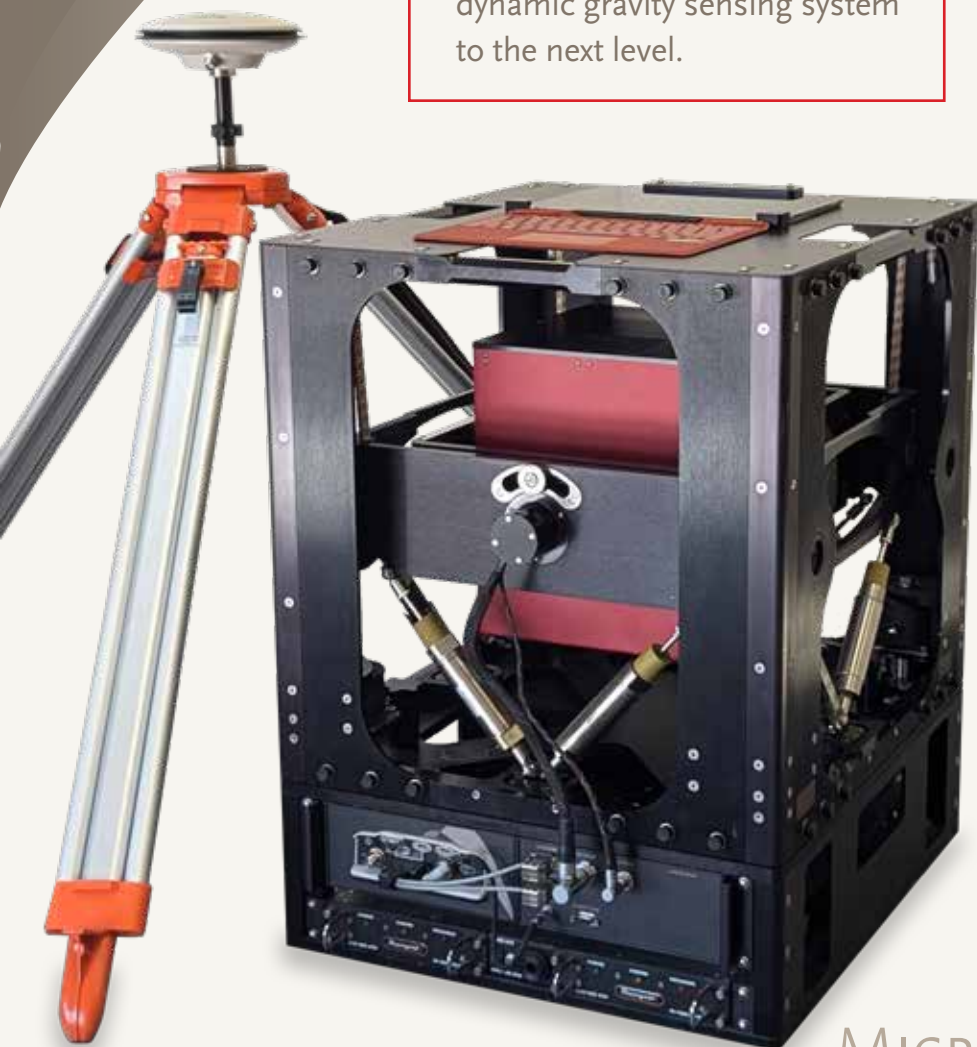

TAGS-7 REPRESENTS THE LATEST DEVELOPMENT

in a long line of L&R-based airborne gravity systems, stretching back to the first successful airborne gravity flights in 1958 and building on the success of the TAGS System. For over 50 years, L&R gravimeters have acquired hundreds of thousands of line kilometers of gravity data during academic, government, and commercial surveys. TAGS-7 blends the latest in GPS and data acquisition technology with the solid foundation of the L&R dynamic gravimeter.

TAGS-7 is an upgrade to the TAGS/Air III gravity meter, and is designed specifically for airborne operations. The system incorporates a time-tested, low-drift, zero-length-spring gravity sensor mounted on a gyro-stabilized gimbal platform. The sensor has a worldwide gravity measuring range (no reset necessary) of 20,000 milliGal.

ADVANCEMENTS

- FULLY INTEGRATED SINGLE UNIT
- MEMS IMU PLATFORM CONTROL
- SMALLER
- LIGHTER
- ROBUST DESIGN

APPLICATIONS INCLUDE


- Geoid Mapping
- Regional Geophysics
- Petroleum Exploration
- Mineral Exploration

SPECIFICATIONS


COMPONENT	VARIABLE	SPECIFICATIONS
SYSTEM PERFORMANCE	REPEATABILITY SENSOR DRIFT DYNAMIC FEEDBACK RANGE MEASUREMENT RANGE	0.75 mGal < 0.1 mGal/day 500 Gal (0.5 g) World Wide
MECHANICAL SPECS	INTEGRATED WEIGHT (MASS) UPS WEIGHT (MASS) DIMENSIONS	170 LBs (72 Kg) 9 LBs (4Kg) or optional 25 LBs (12Kg) 24x22x30 inches , 61x56x76 cm
STABLE PLATFORM SPECS	TURN MODE PITCH/ROLL LIMITS ACTIVE MEASUREMENT MODE LIMITS ACCELEROMETER AC COUPLING PERIOD LEVELING DAMPING COEFFICIENT	+/- 35 degrees +/- 15 degrees 250 Seconds 0.7 of critical damp
POWER & DATA	DATA RECORDING RATE EXTERNAL DATA OUPUT (RS-232)	20 Hz ASCII String
SENSOR SPECS	POWER CONSUMPTION OPERATIONAL POWER CONSUMPTION WARMUP INTERNAL SENSOR TEMP OPERATIONAL TEMP RANGE STORAGE TEMP RANGE	50 to 70 Watts 110 Watts 60 to 70 Celsius 5 to 50 Celcius -10 to 50 Celcius

SPECIFICATIONS SUBJECT TO CHANGE. PART NUMBER 862700 REV 2

Sample Data

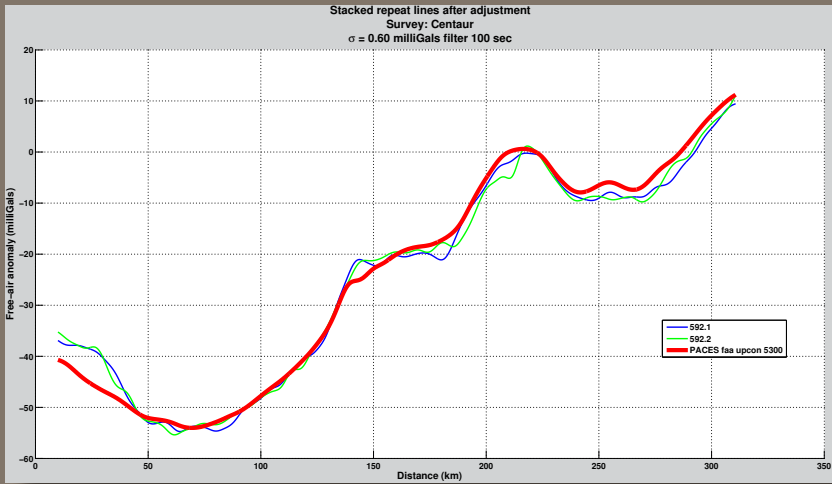

The TAGS-7 data shown above are two repeat measurements of the free-air anomaly acquired on a flight line at 5460 meters altitude. The red line is the free-air anomaly derived from public-domain land gravity data, upward continued to the flight height. The terrain was varied, ranging from 60 to 650 meters above sea level. With a 100 second filter, the standard deviation of the repeats was 0.60 mGals

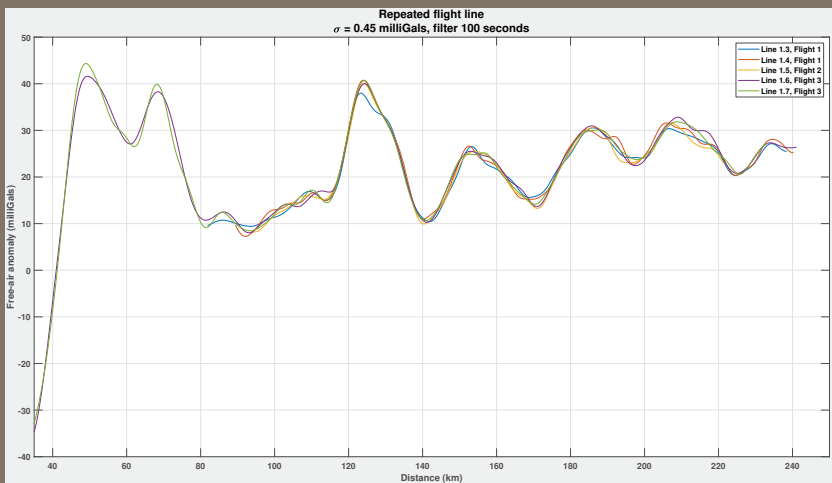

The TAGS-7 data shown above are five repeat measurements of the free-air anomaly acquired on a flight line at 3120 meters altitude. The terrain was generally mountainous, ranging from 1450 to 2900 meters above sea level. With a 100 second filter, the standard deviation of the repeats was 0.45 mGals.

TAGS-7 FEATURES

SENSOR TYPE	Damped Zero-Length-Spring and Mass Type
GRAVITY SENSOR FEEDBACK TYPE	Electro Magnetic Current Sense (Linear Voice Coil)
LEVELING GIMBAL FEEDBACK TYPE	MEMS IMU
UPS	Can fit into integrated system (opt. mil-spec type)
AVAILABLE LIGHTWEIGHT HYBRID FRAME	Aluminum and Carbon Fiber
FAA CERTIFICATION DOCUMENT SUPPORT	Aircraft specific
ULTRA STABLE SENSOR TEMP	Double Oven Feedback controlled (5 mK precision)
SENSOR PRESSURE MONITOR	High Accuracy Internal Pressure Sensor (0.02 mBar)
TEMP CONTROLLED SENSE CIRCUITS	Location Inside Controlled Oven
PRECISE TIMING	UTC GNSS Locked Time Stamps
MULTI-GNSS RECIEVERS	One Base Station and One Integrated Into Sensor
MULTI GNSS ANTENNAS	One Base Station and One Aircraft Mounted
SHIPPING	Component Boxes and Crates
WARRANTY	12 months
SYSTEM LOCKS	Beam, Gimbal and Main Structure Locks
ACQUISITION SOFTWARE	Piper-Pro Control App.
PROCESSING SOFTWARE	AGSYS post processing App.



1401 Horizon Ave. | Lafayette, CO 80026 | USA
 PHONE (303) 828-3499 FAX (303) 828-3288
 EMAIL info@microglacoste.com

WWW.MICROGLACOSTE.COM

MICROg
LA COSTE
 A DIVISION OF LRS